



## CR2430

3V Lithium Battery OEM  
Swiss Made


## Technical Data Sheet

### Specifications

Chemical System	Li / MnO <sub>2</sub>
Nominal Voltage	3 V
Rated Capacity	285 mAh
Standard Discharge Current	0.5 mA
Max. Cont. Discharge Current	4.0 mA
Average Weight	4.1 g
Operating Temperature*	-40 - +85 °C
Self Discharge at 23°C	< 1% / year


### Dimensions

(According to IEC 60086)

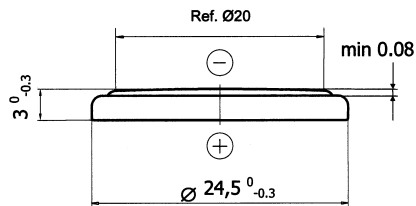


### Performance


Discharge performance at 23°C

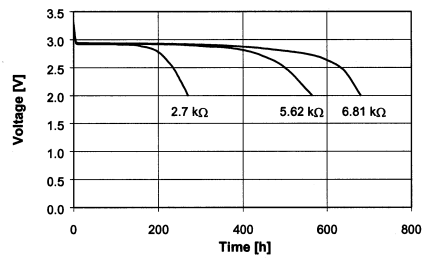


Discharge performance at 23°C

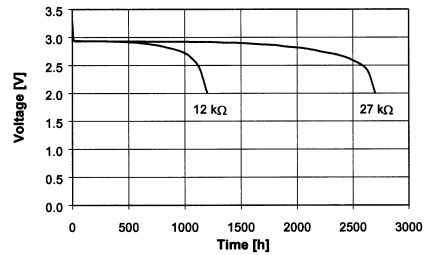

Temperature performance Load 12kΩ

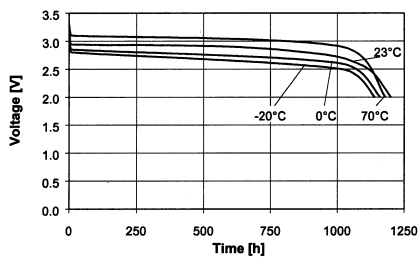

Cell capacity at various loads

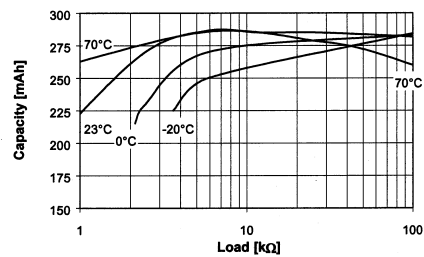

\*In applications where the battery is exposed to temperatures above 70 °C, please contact Rayovac for consultancy.  
Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Rayovac representative.

Rayovac Europe Ltd  
Stephenson Estate District 12,  
Washington, Tyne and Wear  
NE37 3HW, UK

Tel. +44 (0) 191 419 6015  
Fax. +44 (0) 191 419 6153

Rayovac.Micropower@uk.spectrumbrands.com  
www.rayovac.eu

