



335

SR512SW
Watch Battery OEM

Technical Data Sheet



Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	6 mAh, Discharge over 150 k Ω at 23 \pm 3 $^{\circ}$ C to 1,2 V
Operating Temperature	0 $^{\circ}$ C – 60 $^{\circ}$ C
Self Discharge	Less than 7% per year at 23 $^{\circ}$ C
Nominal Weight	~0,13 g

Dimensions


(according IEC 60086-3)

	5,80 mm (0,228")
Diameter	1,25 mm (0,049")
Height	



Discharge Curve

Constant Load	150 k Ω
Starting Drain	10,5 μ A
Temperature	23 \pm 3 $^{\circ}$ C

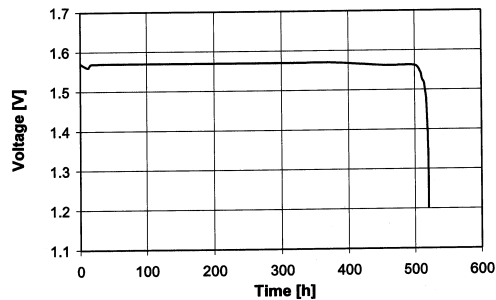

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Rayovac representative.

Rayovac Europe Ltd
Stephenson Estate District 12,
Washington, Tyne and Wear
NE37 3HW, UK

Tel. +44 (0) 191 419 6015
Fax. +44 (0) 191 419 6153

Rayovac.Micropower@uk.spectrumbrands.com
www.rayovac.eu

